

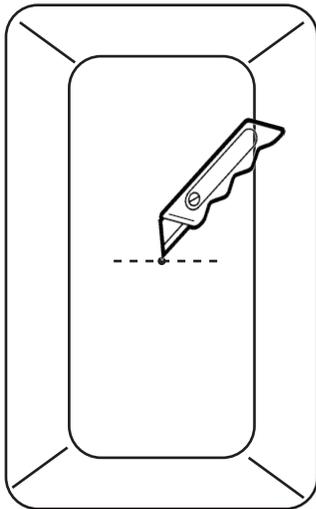


1

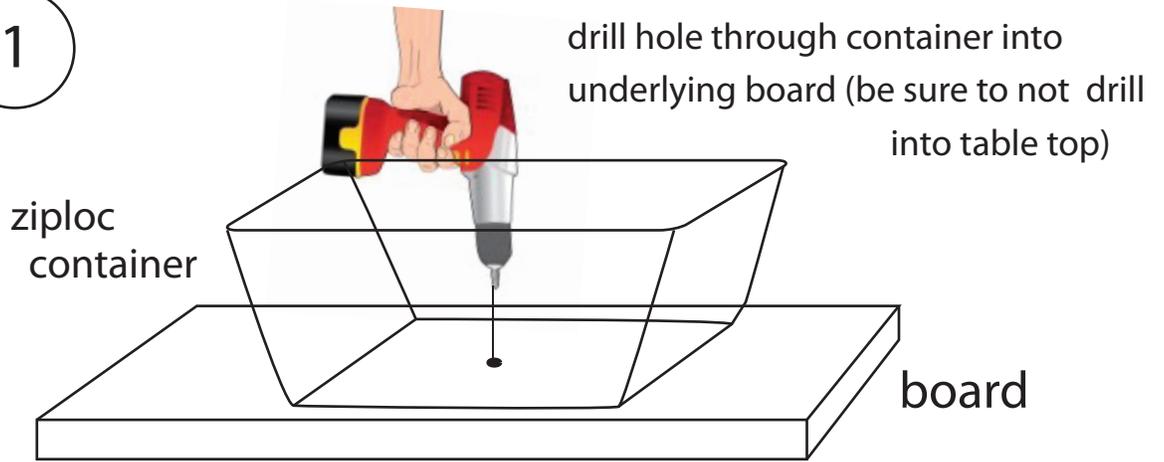


carefully cut across the hole (eyelet will be removed through this slit- so it needs to be just long enough for the eyelet to clear it). Cut perpendicular to long axis of container

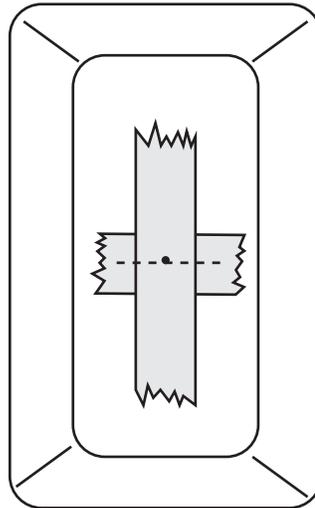




2


cover the hole and slit with masking tape (so plaster won't escape)

3

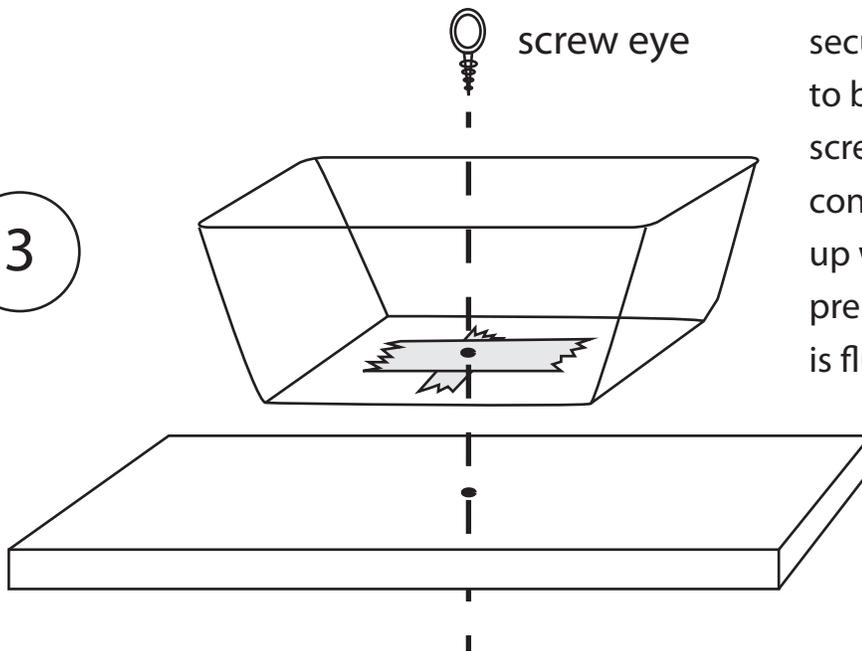

secure container to board with screw eye, and if the container rides up while doing this, press down so container is flush with board

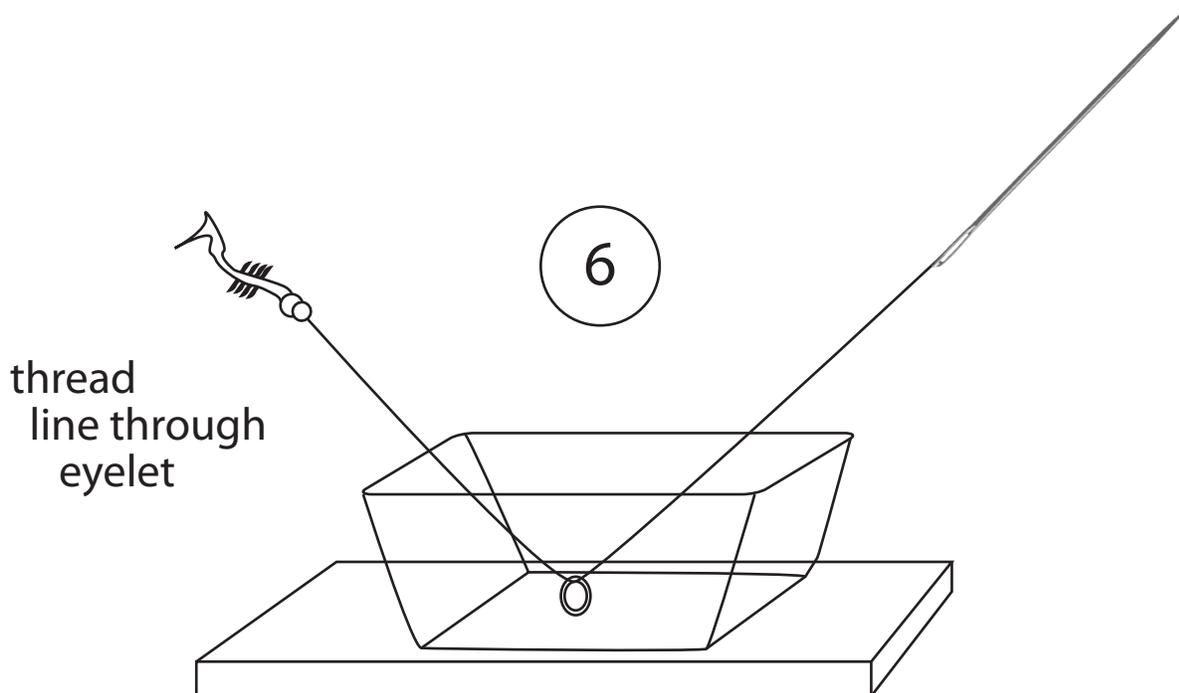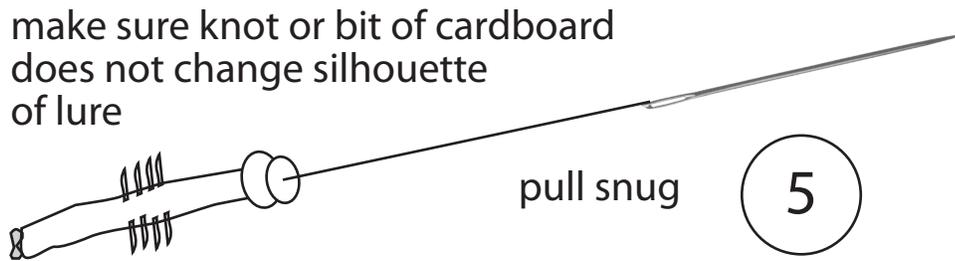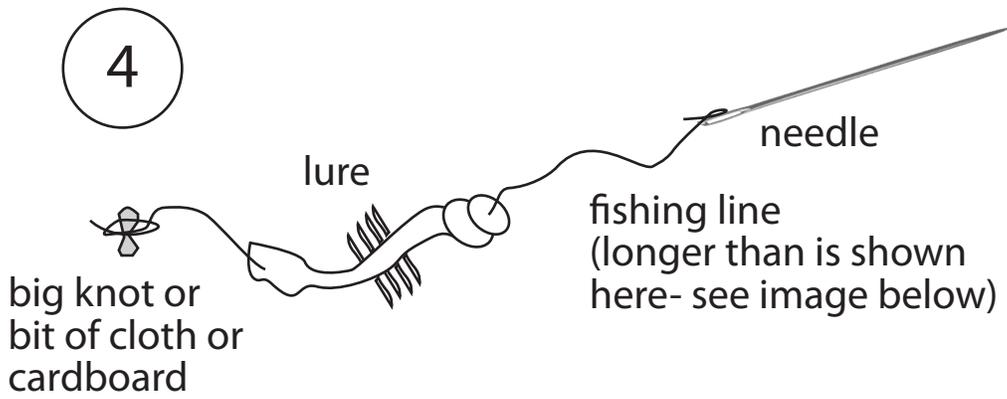

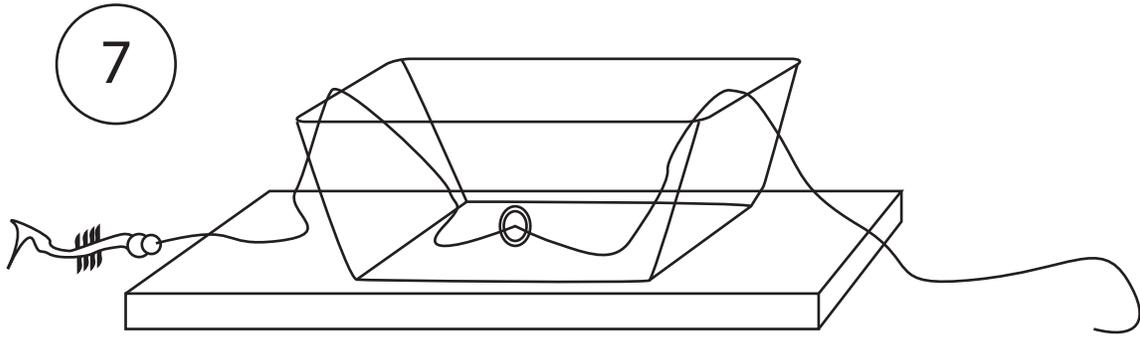

pour in plaster  
of paris layers

WORK QUICKLY WITH PLASTER

use ladle (Black & Tan  
method) for top  
layer

